


02 Core PVC Flexible Power Cable

Part # : 6102

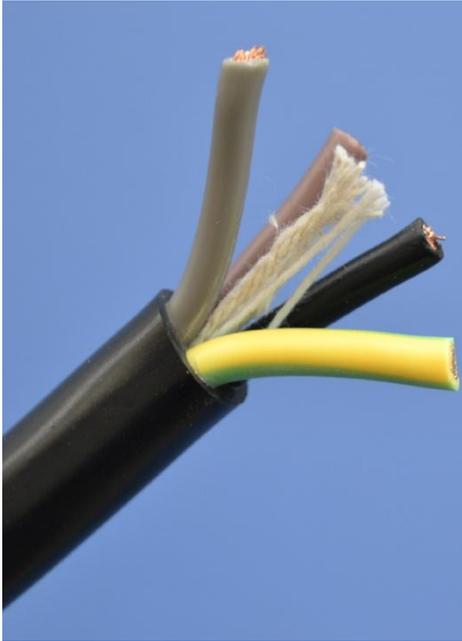

Part #	CONSTRUCTION				
	Nominal Conductor Area (mm ²)	Nominal Conductor Stranding (#/mm)	Insulation Thickness (mm)	Min. Overall Dia (mm)	Max. Overall Dia (mm)
6102.75	0.75	24/0.20	0.6	5.7	7.2
61021.0	1.0	32/0.20	0.6	5.9	7.5
61021.25	1.25	40/0.20	0.7	6.3	8.0
61021.5	1.5	30/0.25	0.7	6.8	8.6
61022.5	2.5	50/0.25	0.8	8.4	10.6
61024.0	4.0	56/0.30	0.8	9.7	12.1
Conductor Type		Stranded			
Conductor Material		Plain Annealed Copper			
Insulation Material		PVC			
Insulation Color		Blue, Brown			
Sheath Material		PVC			
Sheath Color		Black			
Temperature Rating		70°C			
Voltage Rating		300/500V			

Features:

- Plain Annealed Copper Conductor
- Stranded Conductor
- PVC Insulated
- High Flexible Sheath
- CU/PVC/PVC
- Black Sheath
- Packaging 90 Meters

Design:

