


04 Core PVC Flexible Power Cable

Part # : 6104

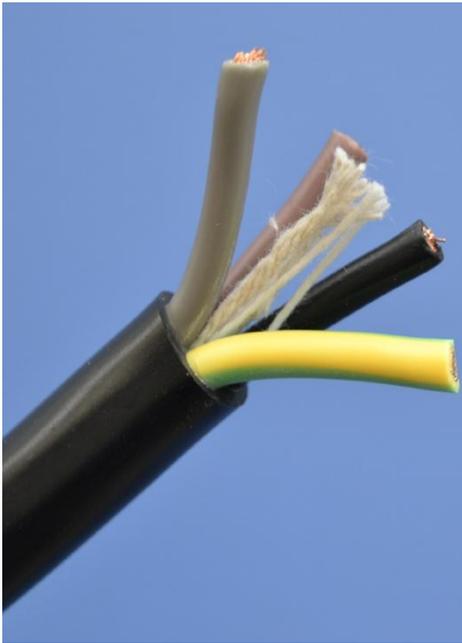

CONSTRUCTION					
Part #	Nominal Conductor Area (mm ²)	Nominal Conductor Stranding (#/mm)	Insulation Thickness (mm)	Min. Overall Dia (mm)	Max. Overall Dia (mm)
6104.75	0.75	24/0.20	0.6	6.6	8.3
61041.0	1.0	32/0.20	0.6	7.1	9.0
61041.5	1.5	30/0.25	0.7	8.4	10.5
61042.5	2.5	50/0.25	0.8	10.1	13.0
61044.0	4.0	56/0.30	0.8	11.5	14.3
Conductor Type	Stranded				
Conductor Material	Plain Annealed Copper				
Insulation Material	PVC				
Inulation Color	Green/Yellow, Brown, Black, Grey				
Sheath Material	PVC				
Sheath Color	Black				
Temprature Rating	70°C				
Voltage Rating	300/500V				

Features:

- Plain Annealed Copper Conductor
- Stranded Conductor
- PVC Insulated
- High Flexible Sheath
- CU/PVC/PVC
- Black Sheath
- Packaging 90 Meters

Design:

