

PVC CABLE

02 Pairs Outdoor Telephone PE Cable

Part # : 3102




CONSTRUCTION	
Conductor:	
Nos.	04
Dia (mm)	0.5
A. Q. L	(+0.001/-0.010)
Material	Solid Bare Copper
Insulation:	
Nos.	04
Dia (mm)	1.0
A. Q. L	(+/-0.10)
Material	General PVC Insulation
Shield:	
Material	Jellyfilled
Sheath:	
Dia (mm)	5.6
A. Q. L	(+/-0.20)
Material	Black PE Jacket
CHARACTERISTICS	
Conductor Resistance	20°C, Conductor DC Resistance
	< 7.31 OHMS/100M
Insulation Resistance	20°C, Insulation Resistance
	> 200 MΩ.M
Rated Temperature	60 °C
Rated Voltage	30 V

Features:

- Copper 24AWG
- Two Twisted Wires
- Packaging 305 Meters
- Jellyfilled
- No Cross Talk
- All Pairs Can Be Used Simultaneously
- Aluminium Foil Wrapped
- Mylar Protection

Design:

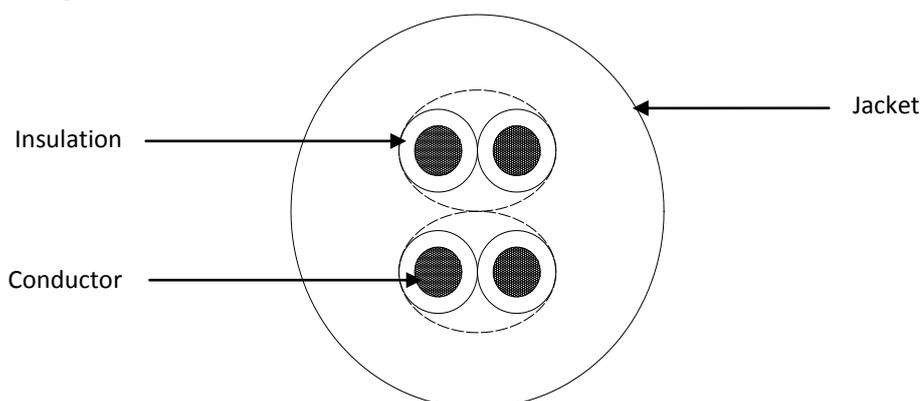

Headquarter
7F Toranomon 40MT Bldg. 5-13-1,
Toranomon, Minato-ku, Tokyo,
Japan, 105-0001
Phone: +81-3-4530-9633
Fax: +81-3-4530-9800
www.ponycables.com