


TELEPHONE PVC CABLE

10 Pairs Telephone PVC Cable

Part # : 3010

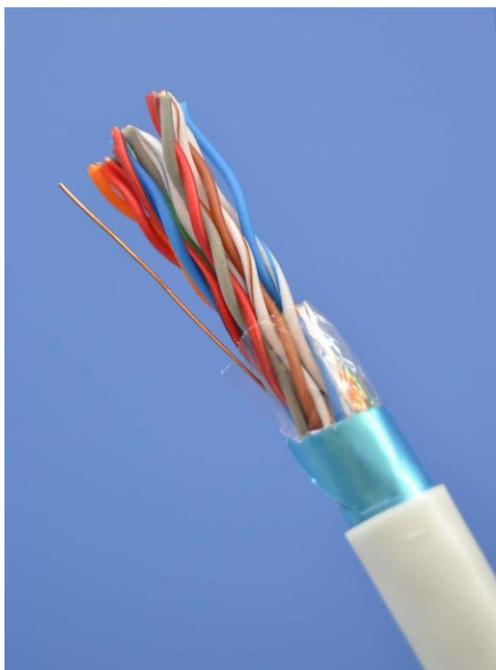


Features:

- Copper 22AWG (0.6mm)
- 24 AWG Drain Wire (0.4mm)
- Two Twisted Wires
- Packaging 90 or 1000 Meters
- Nylon Rip Cord
- No Cross Talk
- All Pairs Can Be Used Simultaneously
- Aluminium Foil Wrapped
- Mylar Protection

<u>CONSTRUCTION</u>	
Conductor:	
Nos.	20
Dia (mm)	0.6
A. Q. L	(+0.001/-0.010)
Material	Solid Bare Copper
Insulation:	
Nos.	20
Dia (mm)	1.0
A. Q. L	(+/-0.10)
Material	General PVC Insulation
Shield (1):	
Material	Spiral Mylar Transparent Shield
Drain Wire:	
Nos.	01
Dia (mm)	0.4
A. Q. L	(+0.001/-0.008)
Material	Solid Bare Copper
Shield (2):	
Material	Spiral Aluminium Foil Shield
Sheath:	
Dia (mm)	8.4
A. Q. L	(+/-0.20)
Material	Grey PVC jacket with Rip-Cord
<u>CHARACTERISTICS</u>	
Conductor Resistance	20°C, Conductor DC Resistance
	< 7.31 OHMS/100M
Insulation Resistance	20°C, Insulation Resistance
	> 200 MΩ.M
Rated Temperature	60 °C
Rated Voltage	30 V

Design:

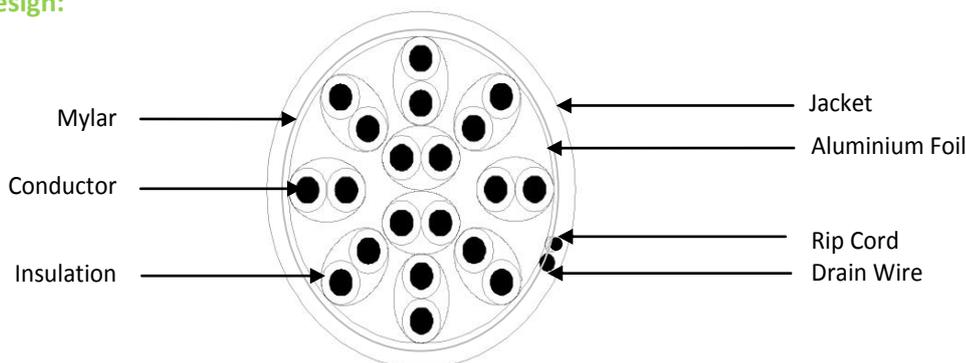

Headquarter
7F Toranomon 40MT Bldg. 5-13-1,
Toranomon, Minato-ku, Tokyo,
Japan, 105-0001
Phone: +81-3-4530-9633
Fax: +81-3-4530-9800
www.ponycables.com

© Pony Cables | Subject to specification changes without notice.