




CONSTRUCTION	
<b>Conductor:</b>	
Nos.	02
Dia (mm)	1/1.13
Material	Bare Copper
Maximum Resistance	18.1Ω/KM
<b>Insulation:</b>	
Type	02
Radial Thickness	0.6mm
Colours/No.s	Brown,Blue
<b>Binding Tape (1):</b>	
Type	Mica tape
Earth/Drain Wire	0.8mm Tinned Copper
<b>Binding Tape (2):</b>	
Type	Fire foil
<b>Sheathing:</b>	
Radial thickness	0.9mm
Color	Red
Marking (tag/reel)	305m/reel, 500m/reel
Diameter (min/max/nom)	6.6±0.2mm
Material	low smoke halogen free - LTS3
STANDARDS	
BS 7629-1:2008	
BS 6387:2013 (Category CWZ)	
EN 50200:2006 (Class PH30)	
BS 5839-1:2013 (Clause 26.2d Standard)	

### Features:

- Stranded Annealed Bare Copper Conductor
- Tinned Copper Drain Wire
- Two Twisted Wire
- Mica Tape Wrapped
- Flame Retardant
- LSZH Sheath
- Packaging 305 Mtr

### Design:

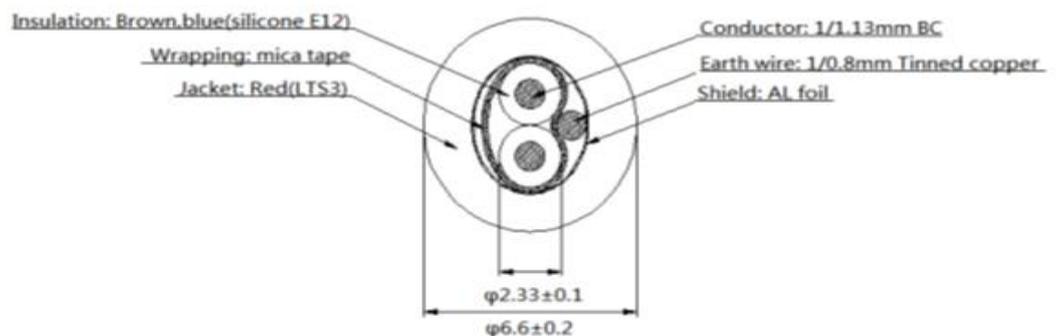

Headquarter  
7F Toranomon 40MT Bldg. 5-13-1,  
Toranomon, Minato-ku, Tokyo,  
Japan, 105-0001  
Phone: +81-3-4530-9633  
Fax: +81-3-4530-9800  
www.ponycables.com