


NETWORK CABLE

50 Pairs Networking Cable

Part # : 25031

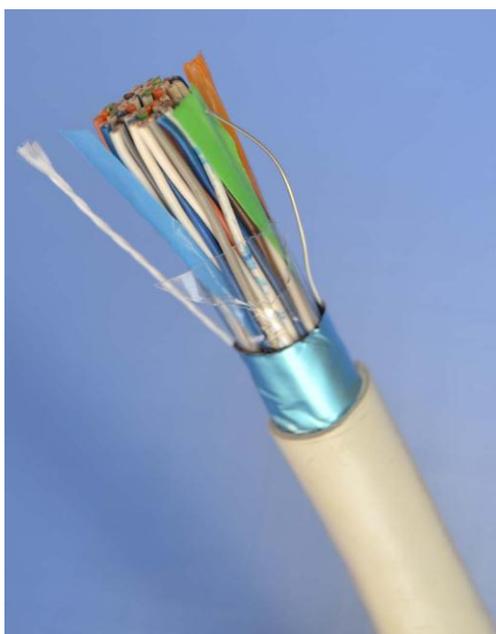

| CONSTRUCTION | |
|------------------------------|---|
| Conductor: | |
| Nos. | 100 |
| Dia (mm) | 0.5 |
| A. Q. L | (+0.001/-0.010) |
| Material | Solid Bare Copper |
| Insulation: | |
| Nos. | 100 |
| Dia (mm) | 1.0 |
| A. Q. L | (+/-0.10) |
| Material | General PVC Insulation |
| Shield (1): | |
| Material | Spiral PP Color Tape (Spiraled Each 50 Pairs) |
| Shield (2): | |
| Material | Spiral Mylar Transparent Shield |
| Drain Wire: | |
| Nos. | 01 |
| Dia (mm) | 0.4 |
| A. Q. L | (+0.001/-0.008) |
| Material | Tinned Copper |
| Shield (3): | |
| Material | Spiral Aluminium Foil Shield |
| Sheath: | |
| Dia (mm) | 11.1 |
| A. Q. L | (+/-0.20) |
| Material | Grey PVC jacket with Rip-Cord |
| CHARACTERISTICS | |
| Conductor Resistance | 20°C, Conductor DC Resistance |
| | < 7.31 OHMS/100M |
| Insulation Resistance | 20°C, Insulation Resistance |
| | > 200 MΩ.M |
| Rated Temperature | 60 °C |
| Rated Voltage | 30 V |

Features:

- Copper 24AWG (0.5mm)
- 24 AWG Drain Wire (0.4mm)
- Two Twisted Wires
- Packaging 500 or 1000 Meters
- Nylon Rip Cord
- No Cross Talk
- All Pairs Can Be Used Simultaneously
- Aluminium Foil Wrapped
- Mylar Protection

Design:

