

# TELEPHONE PVC CABLE

## 50 Pairs Telephone PVC Cable

Part # : 3050




### Features:

- Copper 22AWG (0.6mm)
- 24 AWG Drain Wire (0.4mm)
- Two Twisted Wires
- Packaging 500 or 1000 Meters
- Nylon Rip Cord
- No Cross Talk
- All Pairs Can Be Used Simultaneously
- Aluminium Foil Wrapped
- Mylar Protection

<b>CONSTRUCTION</b>	
<b>Conductor:</b>	
Nos.	100
Dia (mm)	0.6
A. Q. L	(+0.001/-0.010)
Material	Solid Bare Copper
<b>Insulation:</b>	
Nos.	100
Dia (mm)	1.0
A. Q. L	(+/-0.10)
Material	General PVC Insulation
<b>Shield (1):</b>	
Material	Spiral PP Color Tape (Spiraled Each 10 Pairs)
<b>Shield (2):</b>	
Material	Spiral Mylar Transparent Shield
<b>Drain Wire:</b>	
Nos.	01
Dia (mm)	0.4
A. Q. L	(+0.001/-0.008)
Material	Solid Bare Copper
<b>Shield (3):</b>	
Material	Spiral Aluminium Foil Shield
<b>Sheath:</b>	
Dia (mm)	12.1
A. Q. L	( +/-0.20 )
Material	Grey PVC jacket with Rip-Cord
<b>CHARACTERISTICS</b>	
<b>Conductor Resistance</b>	20°C, Conductor DC Resistance
	< 7.31 OHMS/100M
<b>Insulation Resistance</b>	20°C, Insulation Resistance
	> 200 MΩ.M
<b>Rated Temperature</b>	60 °C
<b>Rated Voltage</b>	30 V

### Design:

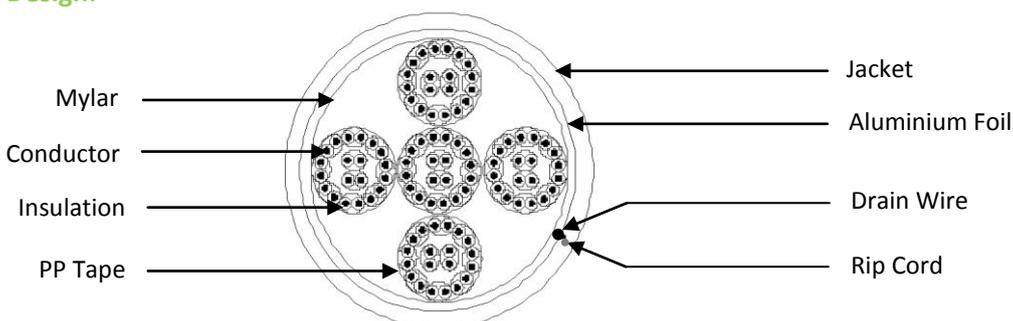

Headquarter  
7F Toranomon 40MT Bldg. 5-13-1,  
Toranomon, Minato-ku, Tokyo,  
Japan, 105-0001  
Phone: +81-3-4530-9633  
Fax: +81-3-4530-9800  
www.ponycables.com

© Pony Cables | Subject to specification changes without notice.