


CONSTRUCTION	
Conductor:	
Nos.	08
Dia (mm)	0.58 (+/-0.005)
Material	Solid Bare Copper
Insulation:	
Nos.	08
Dia (mm)	1.35 ± 0.05mm
Material	Skin-Foam-Skin-PE
Braid:	
Thickness	0.10mm
Coverage	≥40%
Material	Tinned Copper
Shield:	
Thickness	0.60 ± 0.05mm
External O.D	7.8 ± 0.5mm
Surface	Clean
Material	PVC (Complies RoHS)
SHEATH PHYSICAL PROPERTIES	
Before Aging:	
Tensile Strength (Mpa)	≥ 13.5
Elongation (%)	≥ 150
Aging Period (°C x hrs)	100°C x 24hrs x 7d
After Aging:	
Tensile Strength (Mpa)	≥ 12.5
Elongation (%)	≥ 125
Cold Bend (°C x hrs)	(-20 ± 2°C x 24h) 8xCable O.D. No Visible Cracks
ELECTRICAL CHARACTERISTICS (20°C)	
Velocity of Propagation (%)	74
Impedance (Ω)	
1-100MHz	100 ± 15
100-250.0MHz	100 ± 18
250-600.0MHz	100 ± 25
Delay Skew 20°C (ns/100m)	≤ 25
Unbalanced to Ground Capacitance (pf/100m) Max	330
DC Resistance (Ω /100m) Max	9.38
DC Conductor Resistance Unbalance(%) Max	2.0

Features:

- Copper 23AWG (0.6mm)
- Two Twisted Wire
- Skin Foamed Skin PE Insulation
- Aluminium/Mylar Screen
- Braid Screen
- Nylon Rip Cord
- Packaging 305 Meters

Design:

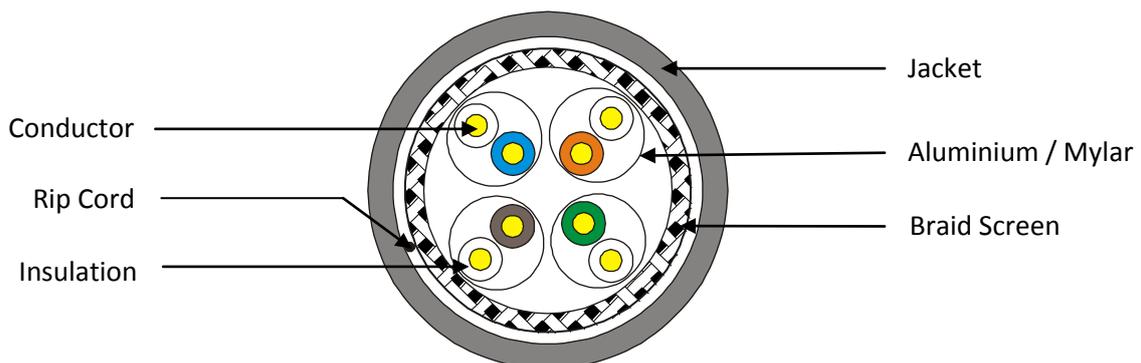

INSULATION CHROMATOGRAM

Number	Insulation Chromatogram	Number	Insulation Chromatogram
1	Blue	2	Orange
	White-Blue		White-Orange
3	Green	4	Brown
	White-Green		White-Brown

MAIN TRANSMISSION CHARACTERISTICS

Frequency (MHz)	Return Loss (≥db/100m)	Attenuation (≤db/100m)	NEXT (≥db)	Time Delay (≤ns/100m)	PSNEXT (≥db)	ELFEXT (≥db)	PSELFEXT (≥db)
1	20.0	--	78.0	570.0	75.0	78.0	75.0
4.0	23.0	3.74	78.0	552.0	75.0	78.0	75.0
8.0	24.5	5.24	78.0	546.7	75.0	75.9	72.9
10.0	25.0	5.86	78.0	545.4	75.0	74.0	71.0
16.0	25.0	7.41	78.0	543.0	75.0	69.9	66.9
20.0	25.0	8.29	78.0	542.0	75.0	68.0	65.0
25.0	24.3	9.29	78.0	541.2	75.0	66.0	63.0
31.25	23.6	10.41	78.0	540.4	75.0	64.1	61.1
62.5	21.5	14.88	75.5	538.6	72.5	58.1	55.1
100	20.1	19.02	72.4	537.6	69.4	54.0	51.0
200	18.0	27.47	67.9	536.5	64.9	48.0	45.0
250	17.3	30.97	66.4	536.3	63.4	46.0	43.0
300	17.3	34.19	65.2	536.1	62.2	44.5	41.5
600	17.3	50.10	60.7	535.5	57.7	38.4	35.4



Headquarter
 7F Toranomom 40MT Bldg. 5-13-1,
 Toranomom, Minato-ku, Tokyo,
 Japan, 105-0001
 Phone: +81-3-4530-9633
 Fax: +81-3-4530-9800
 www.ponycables.com